

The logo for JASNO, consisting of the letters 'JASNO' in white, bold, uppercase font, centered within a dark blue, rounded rectangular shape that tapers at the bottom.

JASNO

FOLDS

Specification Folds

Disclaimer JASNO reserves the right to change the contents of this document without notice.

JASNO Folds

JASNO folds: unique folding curtains produced from woven paper. The design of these curtains was developed in collaboration with studio Daphna Laurens.


Folding curtains in JASNO style

Together with studio Daphna Laurens, JASNO has produced an innovative variant of an existing product. Characteristic of this new product is the simple, clean-lined and contemporary design, perfectly matching the JASNO style.


The collection consists of a select number of colours for the fabrics and wooden strips. It is up to the individual consumer to choose a combination that matches his or her personal style. The fabrics are produced from woven paper, and are available in a semi-transparent, light filtering and blackout variant.

Dutch Design

The Folds were developed in collaboration with Dutch Designers studio Daphna Laurens, a celebrated Dutch design duo that has built up a reputation in the field of design, over the past few years. They regularly attend major design fairs in the Netherlands and abroad, including the Dutch Design Week, and they have won a number of design awards.

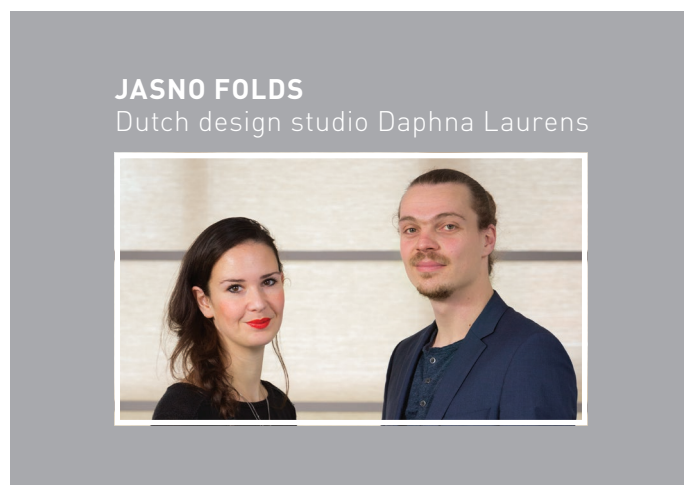


The highlights of JASNO Folds

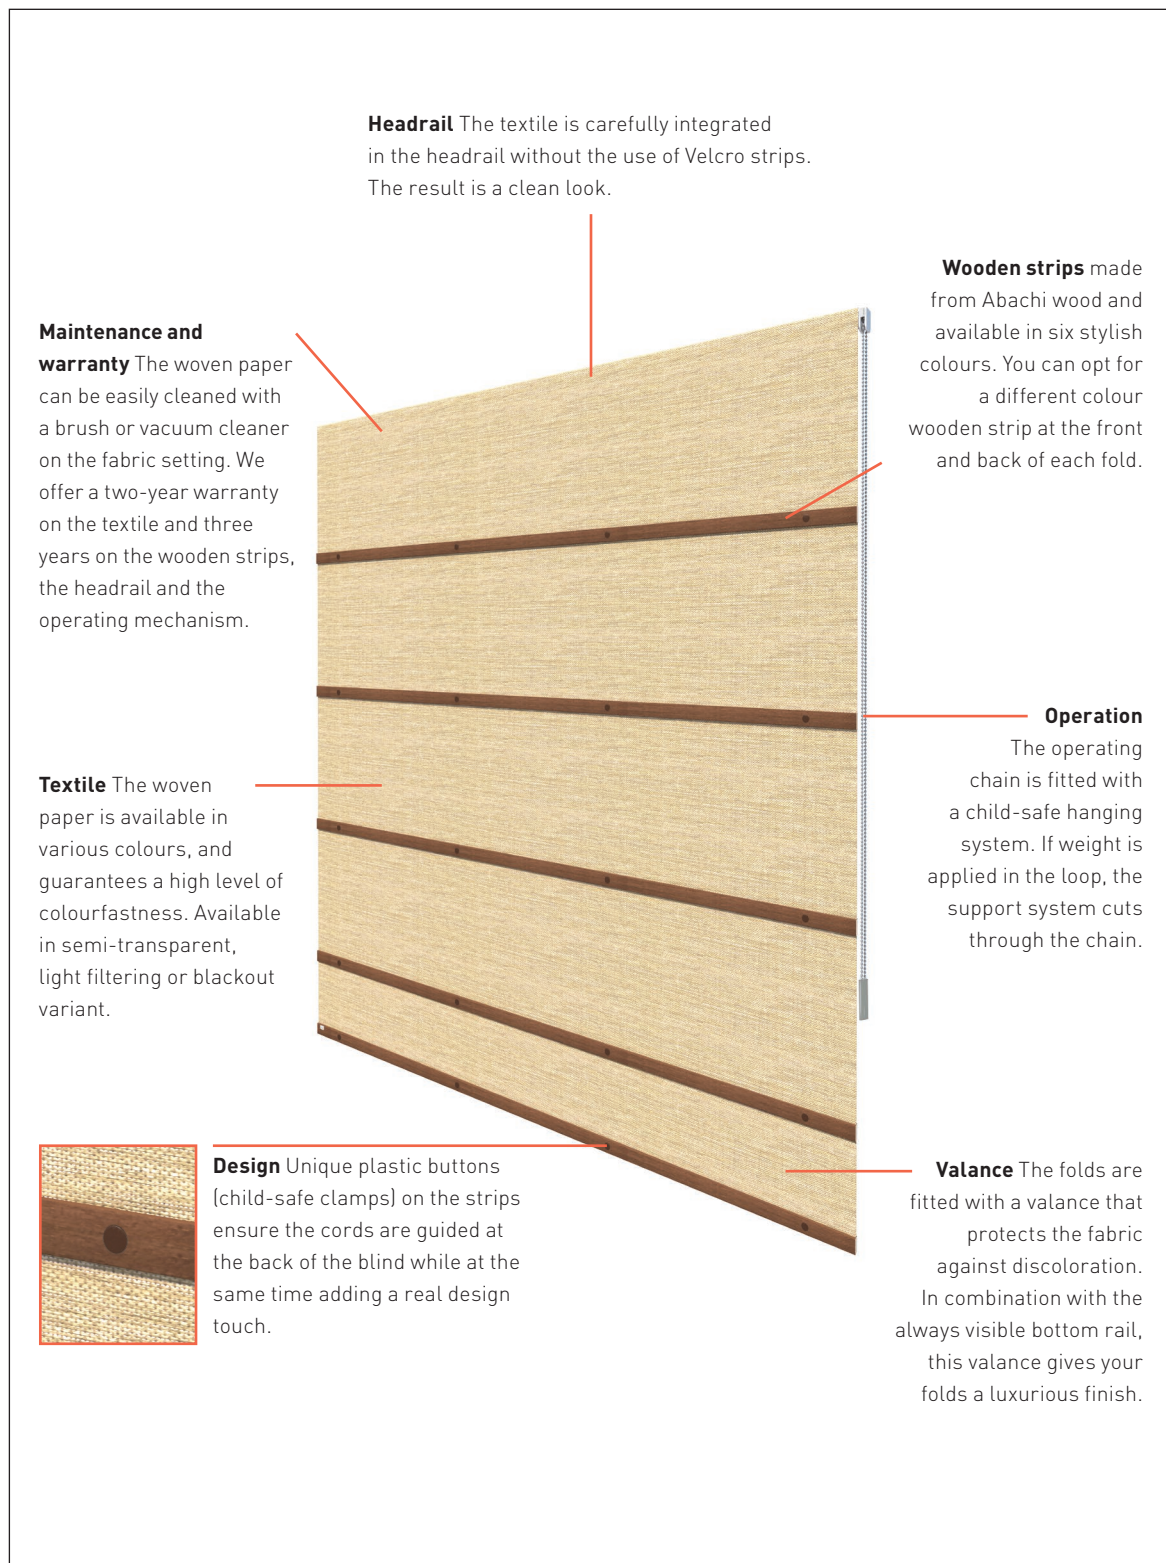

Inhoud

| | |
|--|----|
| 1. The design of JASNO Folds | 5 |
| Wooden strip..... | 5 |
| White aluminium profile..... | 6 |
| Woven paper | 6 |
| Operating chain | 7 |
| Play at back of fold in raised position..... | 9 |
| 2. Order information | 10 |
| Determining the ordering sizes | 10 |
| Sizes and tolerances | 12 |
| Number of wooden strips at ordering height..... | 12 |
| Number of cords for order width..... | 12 |
| Height of blind in raised position | 13 |
| 3. Folds of uneven height next to one another | 14 |
| 4. Folds placed in the corner | 15 |
| 5. Overview of colours | 16 |
| 6. Somfy motorized | 18 |
| Brief information on Somfy options..... | 18 |
| 7. Installation instructions | 22 |
| In the opening – on the frame..... | 22 |
| Against the ceiling | 22 |
| In the opening or on the frame with extension bracket..... | 23 |
| Position of mounting brackets..... | 23 |
| 8. Use and operation | 24 |
| 9. Warranty and maintenance | 25 |
| 10. Delivery time | 25 |

1. The design of JASNO Folds

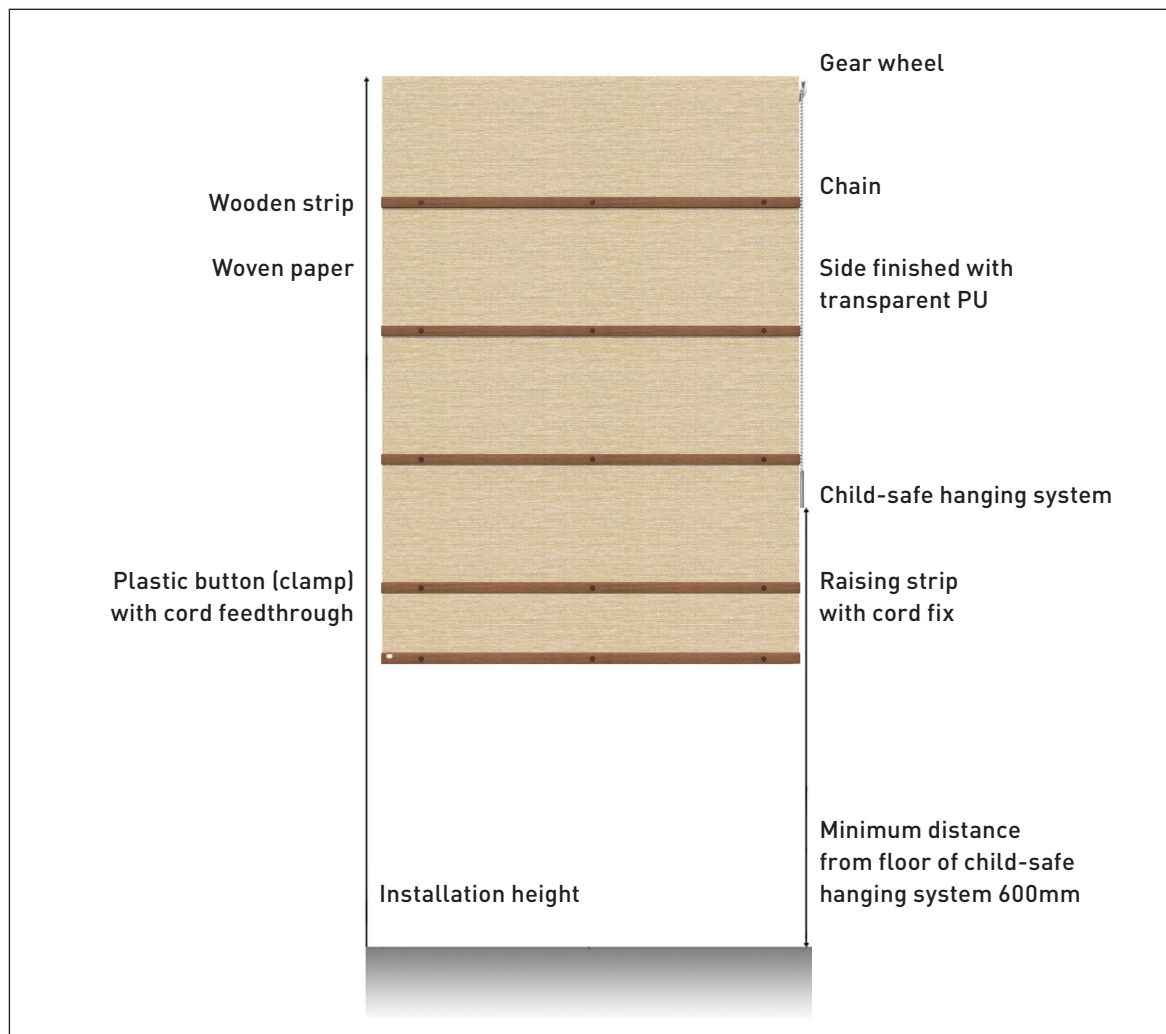

Wooden strip

The wooden strips are made from Abachi wood, and give the folds a natural look. A different colour can be selected for the wooden strip on the front and the wooden strip on the back (= cord side). Remember that the colour of the pin is matched to the colour of the front strip. If for example you have selected a white front strip, a white plastic button (clamp) will be selected. With a black back strip, the white plastic button (clamps) will stand out.

The sides are deliberately left unpainted so you can see the attractive natural products used.

On the one before last strip, the cord is held back using a cord fix. To ensure child safety, the cord is able to break free from each plastic pin.

Maximum warping tolerance is 5mm per 1000mm width.

White aluminium profile

The woven paper is seamlessly fed into the aluminium profile, resulting in a clean finish result. No more Velcro strips that can work free.

Woven paper

The choice of material is clearly an integral part of the overall design. The natural look of the wooden strips and woven paper results in a brand-new type of folding curtain. Partly thanks to the clamp technique employed, it is no longer necessary to cut to size thereby further emphasising the simplicity of the design. The woven paper is subject to a 24 month warranty.

The semi-transparent version allows the unique play of light from inside to outside, and vice versa.

The light filtering version slightly dims the light level, and prevents people looking in from outside, in the evenings.

The blackout version as the name suggests ensures complete blackout and is ideal for use in the bedroom. In the blackout version, the fabric is inserted separately behind the woven paper and held in position by the wooden strips.

To prevent the fabric fraying, the edges of the woven paper are finished with transparent PU.

Side view of blackout version



Irrespective of size, no joining seams are used. In other words, for every JASNO fold, the woven paper is cut from a single sheet, for a clean finish look.

Operating chain

The operating chain is made from pale grey plastic, and has a gear ratio of 1:2. The operating chain can be ordered either left or right, and is fitted NEXT to the textile.

To ensure child safety, the chain is fitted in the factory with a hanging system. This child-safe hanging system includes a cutting mechanism, which cuts the chain if weight is applied to the loop.




Also with a view to ensuring child safety, the length of the operating chain is subject to new requirements:


| Order height fold in mm | Compulsory installation height from the floor in mm | If installation height is specified in mm | Length of chain from top of fold (length excluding hanging system 100mm) in mm. Tolerance approx. 10mm |
|-------------------------|---|---|---|
| 500 < 730 | 1500 | | 350 |
| 730 < 955 | 1500 | | 600 |
| 955 < 1180 | 1500 | | 750 |
| 1180 < 1405 | 1500 | | 800 |
| 1405 < 1500 | 1500 | | 800 |
| 1500 < 1630 | | 1500 < 1630 | 800 |
| 1630 < 1855 | | 1630 < 1855 | 900 |
| 1855 < 2080 | | 1855 < 2080 | 1125 |
| 2080 < 2305 | | 2080 < 2305 | 1350 |
| 2305 < 2530 | | 2305 < 2530 | 1575 |
| 2530 < 2755 | | 2530 < 2755 | 1800 |
| 2755 < 2980 | | 2755 < 2980 | 2025 |
| 2980 < 3200 | | 2980 < 3200 | 2250 |
| | | 3200 < 3425 | 2475 |
| | | 3425 < 3650 | 2700 |
| | | 3650 < 3875 | 2925 |
| | | 3875 < 4100 | 3150 |

The minimum compulsory installation height for JASNO Folds is 1500mm (measured from the floor)

Play at back of fold in raised position

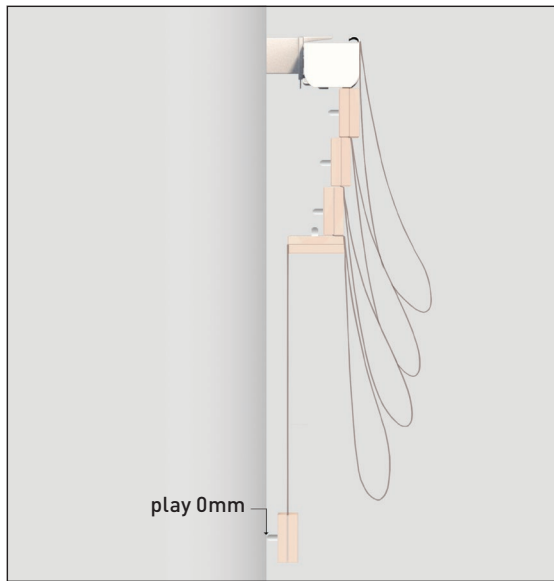


Fitted with standard mounting bracket
(including transparent spacer)

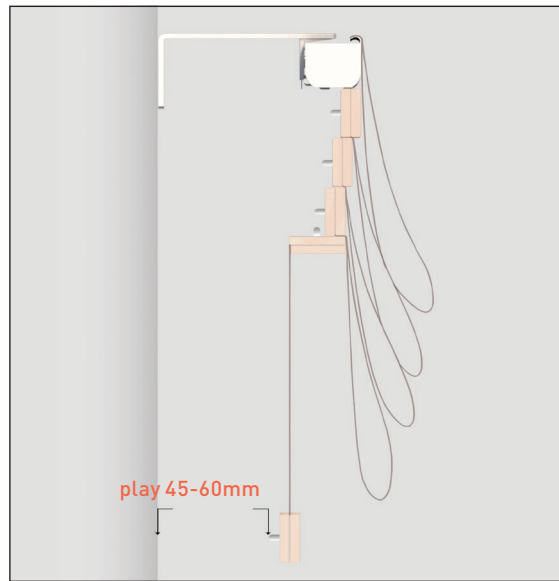


Fitted with extension bracket
(added price option)

2. Order information

Determining the ordering sizes

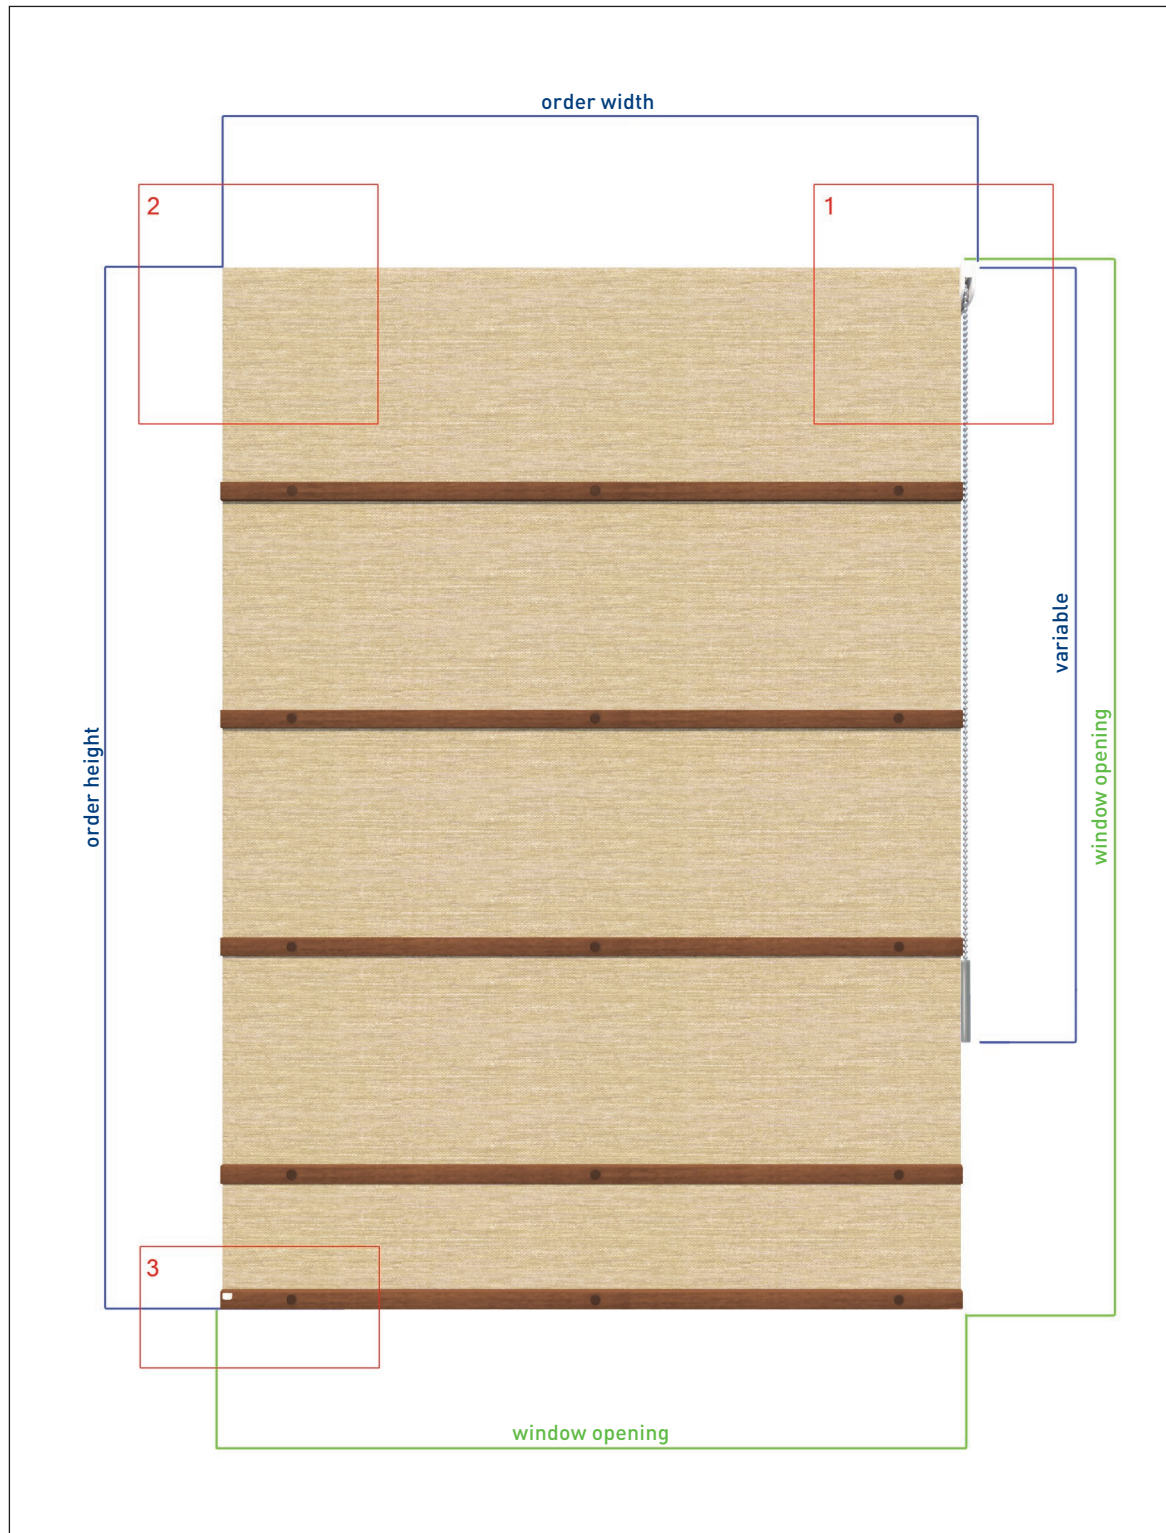

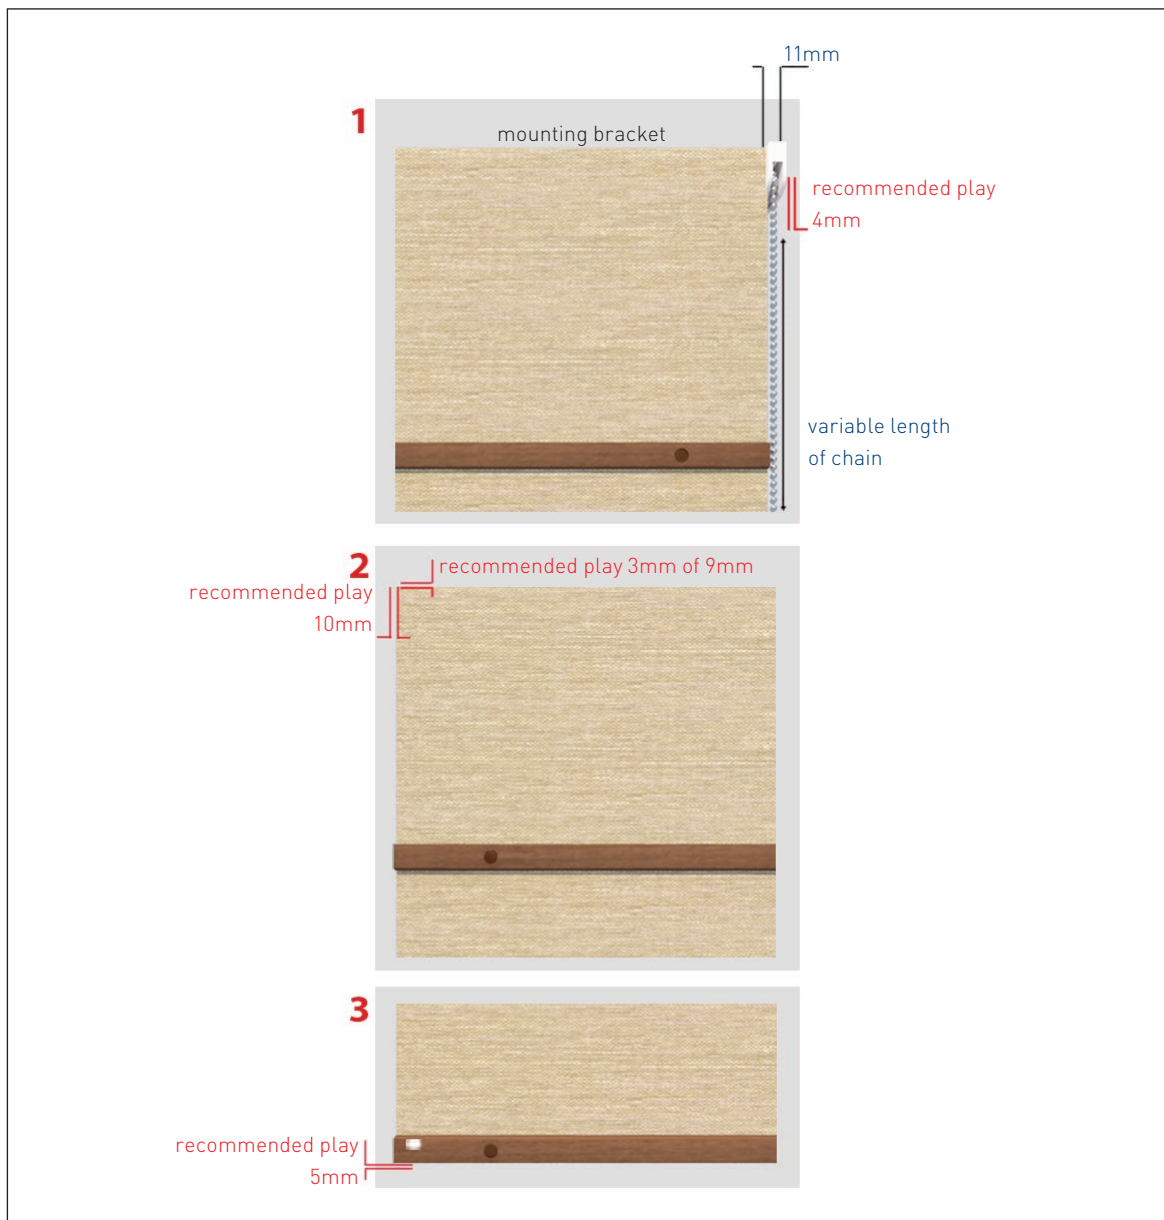

Recommended play in height

Fitting with standard mounting bracket: 3mm play at top

Fitting with extension bracket 95mm: 9mm play at top

5mm at bottom: this means the bottom wooden strip is suspended 5mm clear of the floor or window sill

Recommended play in width

4mm on operating side: this results in play of 15mm from textile / wooden strip to opening side.

10mm on non-operating side: this creates a play of 10mm from the textile / wooden strip to the opening side.

Recommended play between JASNO Folds fitted in 1 opening is 10mm.

Sizes and tolerances

| | Minimum | Maximum size for semi-transparent and light filtering | Maximum size for blackout | Tolerances |
|--------|---------|---|---------------------------|------------|
| Width | 300mm | 2400mm | 2400mm | +/- 2mm |
| Height | 500mm | 3200mm | 3200mm | +/- 3mm |

Number of wooden strips at ordering height

Important note: This table does not apply if different ordering heights have to be aligned with one another. To ensure correct alignment, the number of wooden strips may deviate from the standard. The distances between the wooden strips will not always be equal.

| Order height in mm semi-transparent and light filtering | Order height in mm blackout | # rows of wooden strip (including bottom strip) |
|---|-----------------------------|---|
| 500 ≤ 671 | 500 ≤ 666 | 2 |
| 672 ≤ 1147 | 667 ≤ 1142 | 3 |
| 1148 ≤ 1597 | 1143 ≤ 1592 | 4 |
| 1598 ≤ 2047 | 1593 ≤ 2042 | 5 |
| 2048 ≤ 2497 | 2043 ≤ 2492 | 6 |
| 2498 ≤ 2947 | 2493 ≤ 2942 | 7 |
| 2948 ≤ 3200 | 2943 ≤ 3200 | 8 |

Number of cords for order width

| Order width in mm | # cords |
|-------------------|---------|
| 300 ≤ 770 | 2 |
| 771 ≤ 1370 | 3 |
| 1371 ≤ 1970 | 4 |
| 1971 ≤ 2400 | 5 |


Height of blind in raised position

Important note: This table does not apply if different heights have to be aligned with one another. To ensure correct alignment, the number of wooden strips may deviate from the standard. The distances between the wooden strips will not always be equal throughout.

| Order height | # Rows of wooden strip | Raised height in cm (rounded up) | Order height | # Rows of wooden strip | Raised height in cm (rounded up) |
|--------------|------------------------|----------------------------------|--------------|------------------------|----------------------------------|
| 500 | 2 | 22 | 1900 | 5 | 34 |
| 550 | 2 | 24 | 1950 | 5 | 35 |
| 600 | 2 | 26 | 2000 | 5 | 35 |
| 671 | 2 | 28 | 2047 | 5 | 36 |
| 672 | 3 | 21 | 2048 | 6 | 34 |
| 700 | 3 | 22 | 2100 | 6 | 35 |
| 750 | 3 | 23 | 2150 | 6 | 35 |
| 800 | 3 | 24 | 2200 | 6 | 36 |
| 850 | 3 | 25 | 2250 | 6 | 36 |
| 900 | 3 | 26 | 2300 | 6 | 37 |
| 950 | 3 | 27 | 2350 | 6 | 37 |
| 1000 | 3 | 28 | 2400 | 6 | 37 |
| 1050 | 3 | 29 | 2450 | 6 | 38 |
| 1100 | 3 | 30 | 2497 | 6 | 38 |
| 1147 | 3 | 31 | 2498 | 7 | 37 |
| 1148 | 4 | 27 | 2550 | 7 | 38 |
| 1200 | 4 | 28 | 2600 | 7 | 38 |
| 1250 | 4 | 28 | 2650 | 7 | 39 |
| 1300 | 4 | 29 | 2700 | 7 | 39 |
| 1350 | 4 | 30 | 2750 | 7 | 39 |
| 1400 | 4 | 30 | 2800 | 7 | 40 |
| 1450 | 4 | 31 | 2850 | 7 | 40 |
| 1500 | 4 | 32 | 2900 | 7 | 40 |
| 1550 | 4 | 33 | 2947 | 7 | 41 |
| 1597 | 4 | 33 | 2948 | 8 | 40 |
| 1598 | 5 | 31 | 3000 | 8 | 41 |
| 1650 | 5 | 31 | 3050 | 8 | 41 |
| 1700 | 5 | 32 | 3100 | 8 | 41 |
| 1750 | 5 | 32 | 3150 | 8 | 42 |
| 1800 | 5 | 33 | 3200 | 8 | 42 |
| 1850 | 5 | 34 | | | |


3. Folds of uneven height next to one another

To ensure correct alignment, the number of wooden strips may deviate from the standard. The distances between the wooden strips will not always be the same throughout, so when raised, the folds may differ.

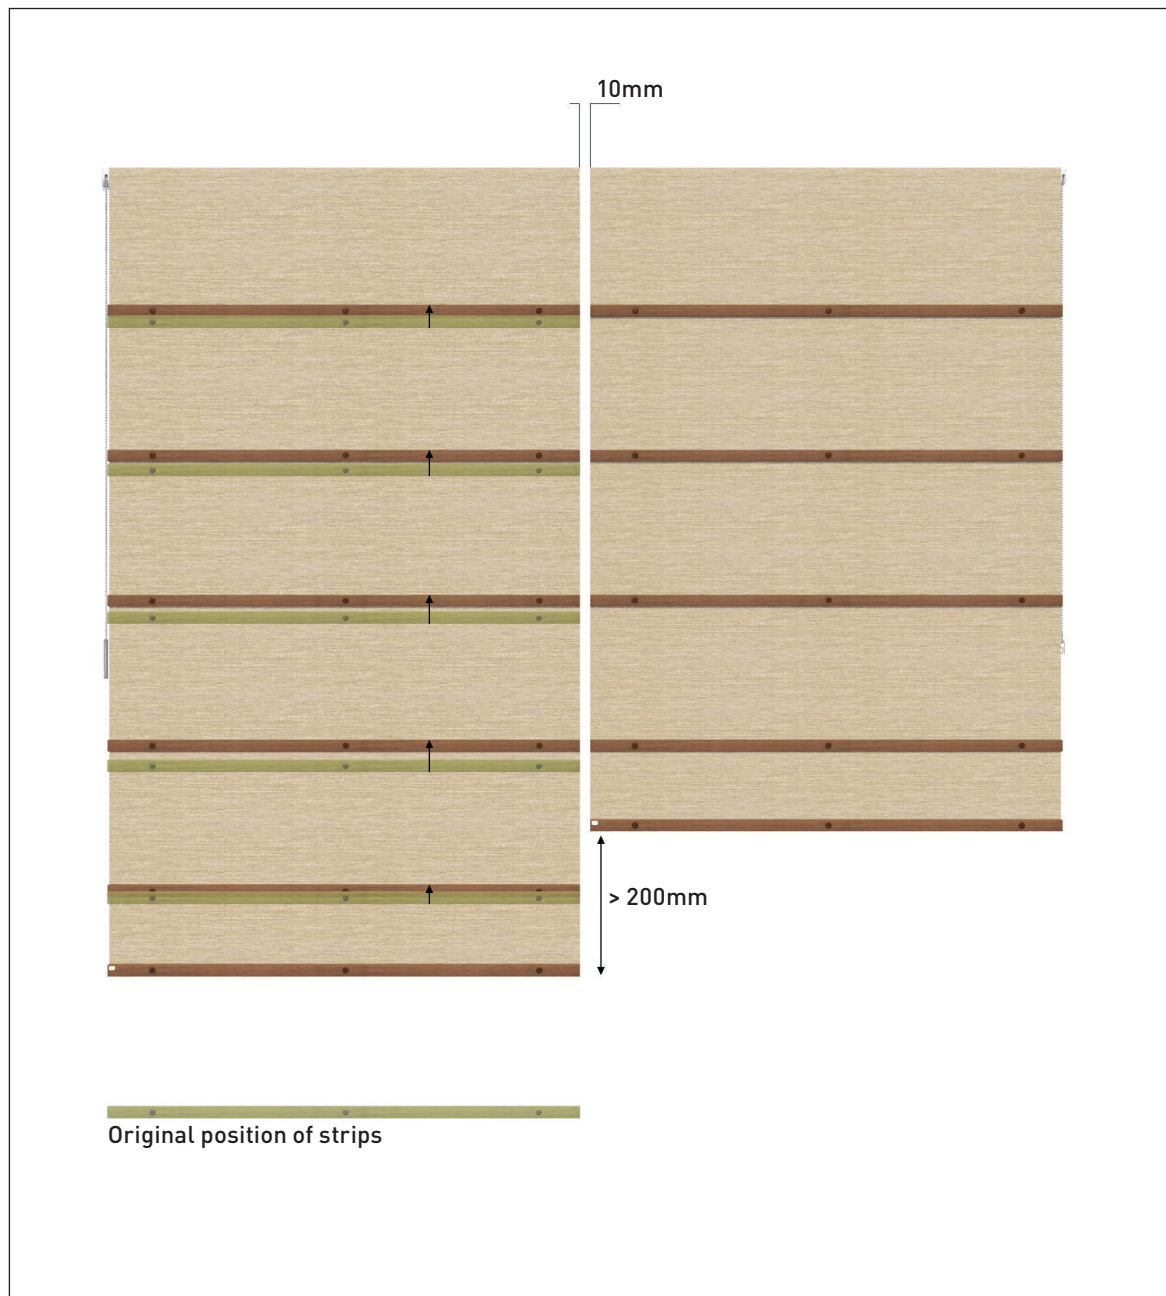

The positions marked in green are the original positions, without alignment.

4. Folds placed in the corner

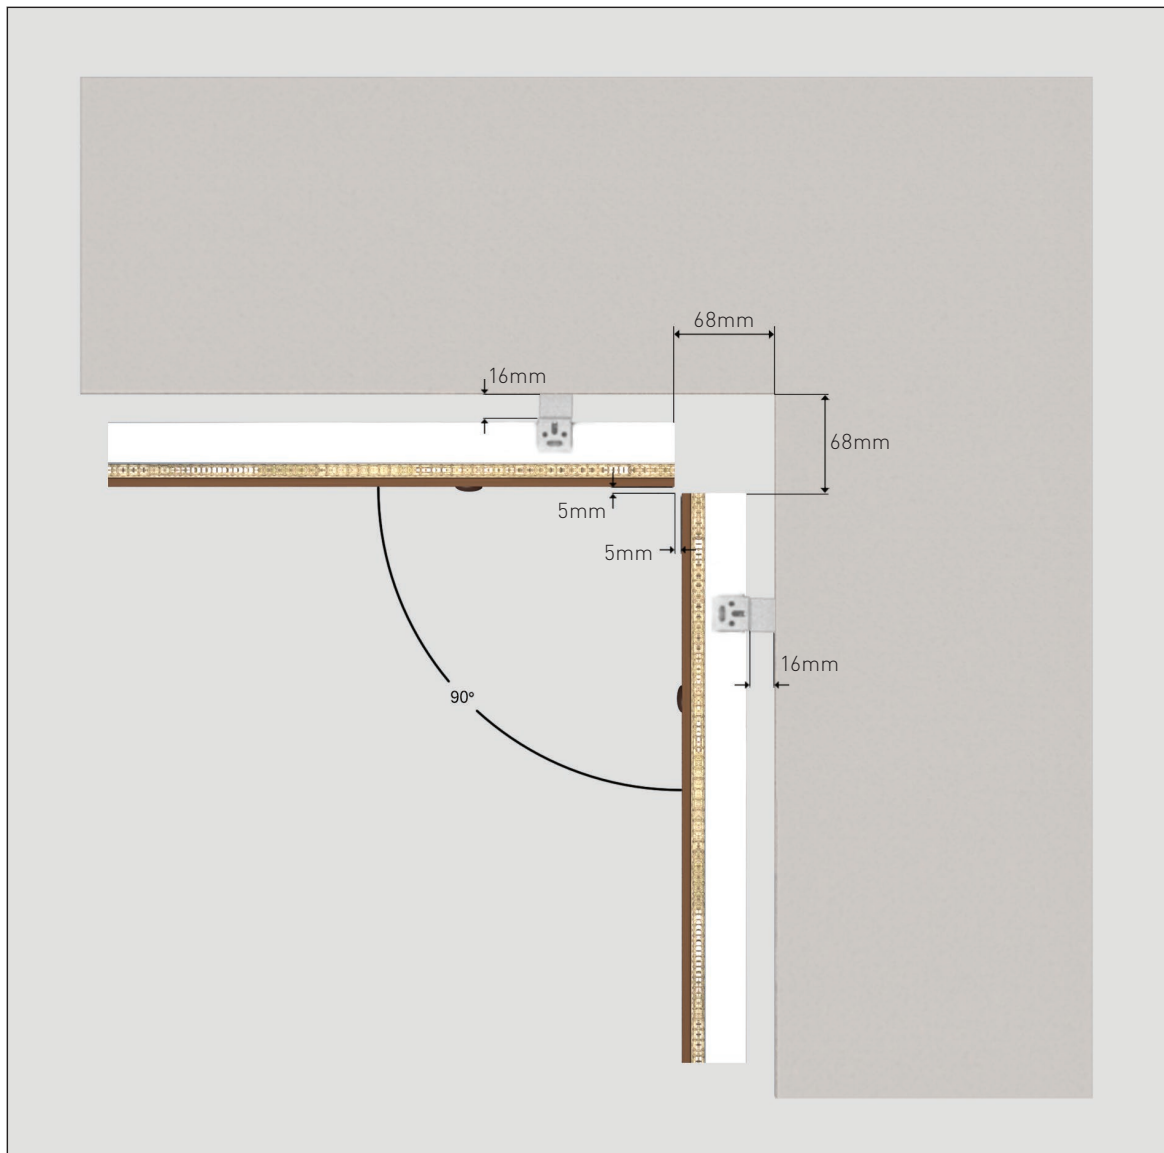




Sizes in a corner situation if fitted using the 'click' mounting bracket (including transparent spacer). The transparent spacer has a depth of 16mm.

Note: Because the folds of material take up space on the inward side, it is not possible to raise both folds to maximum height.

5. Overview of colours

In the blackout version, the fabric is inserted separately behind the woven paper and held in position by the wooden strips. This means that for every woven paper colour option, you are free to choose the colour of BL fabric to match any woven paper colour. This means that the outside can be matched with the BL fabric, to ensure an attractive result.

| | Colour name woven paper and BL | Colour-coordinated cord | Transparency | Colourfastness according to ISO 105 B02 (2013) standard |
|------------------|--------------------------------|-------------------------|---|---|
| Semi-transparent | 034 Desert Breeze | Sand colour |  | 5 - 7 on an 8-point scale |
| | 035 Simply Grey | Pale grey | | |
| | 501 Snow White | White | | |
| | 505 Warm Cocoa | Dark brown | | |
| | 506 Black Olive | Light brown | | |
| | 519 Pure Linen | Linen | | |
| Light filtering | LF034 Desert Breeze | Sand colour |  | |
| | LF035 Simply Grey | Pale grey | | |
| | LF501 Snow White | White | | |
| | LF505 Warm Cocoa | Dark brown | | |
| | LF506 Black Olive | Light brown | | |
| | LF507 River Grey | Pale grey | | |
| | LF519 Pure Linen | Linen | | |
| | LF601 Taupe | Linen | | |
| | LF635 Matte Black | Light brown | | |
| | LF710 Black Marble | Pale grey | | |
| | LF722 Antique Brown | Light brown | | |
| Blackout | BL029 Cream | White |  | |
| | BL082 Light Grey | Pale grey | | |
| | BL090 Warm Grey | Pale grey | | |

You are free to choose the colour of the wooden strips irrespective of the colour of the woven paper, and you can choose a different colour wooden strip at front and back. The colour of the plastic button (clamp) is of course matched to the colour of the wooden strip on the front. If for example you select a white strip on the front, a white plastic button clamp will be used. If you then select a black strip on the back, the white plastic button clamps will stand out.

Despite the UV blockers, discolouration of the textile is always possible. This is most quickly visible with the black tones.

The sides of the wooden strips are deliberately left unpainted so you can see the attractive natural products used.

| Colour name wooden strip | Plastic button clamp |
|---------------------------------|-----------------------------|
| AB003 Silk White | White |
| AB706 Silver Pearl | Pale grey |
| AB212 Dark Teak | Dark brown |
| AB221 Black Walnut | Black |
| AB246 Matte Black | Black |
| AB050 Sandy Grey | Sand colour |

It is **NOT** possible to order other colours.

Order your JASNO Folds preferably in a single order since colours may differ slightly between different orders.


6. Somfy motorized

The minimum order width with a motorised version is 820mm.

Brief information on Somfy options


General: The motors are only available in an RTS, low-voltage model. These motors cannot be directly connected to a domotics system. Consult your domotics specialist.

JASNO Folds with battery-powered motor (Somfy Tilt & Lift 25 RTS)

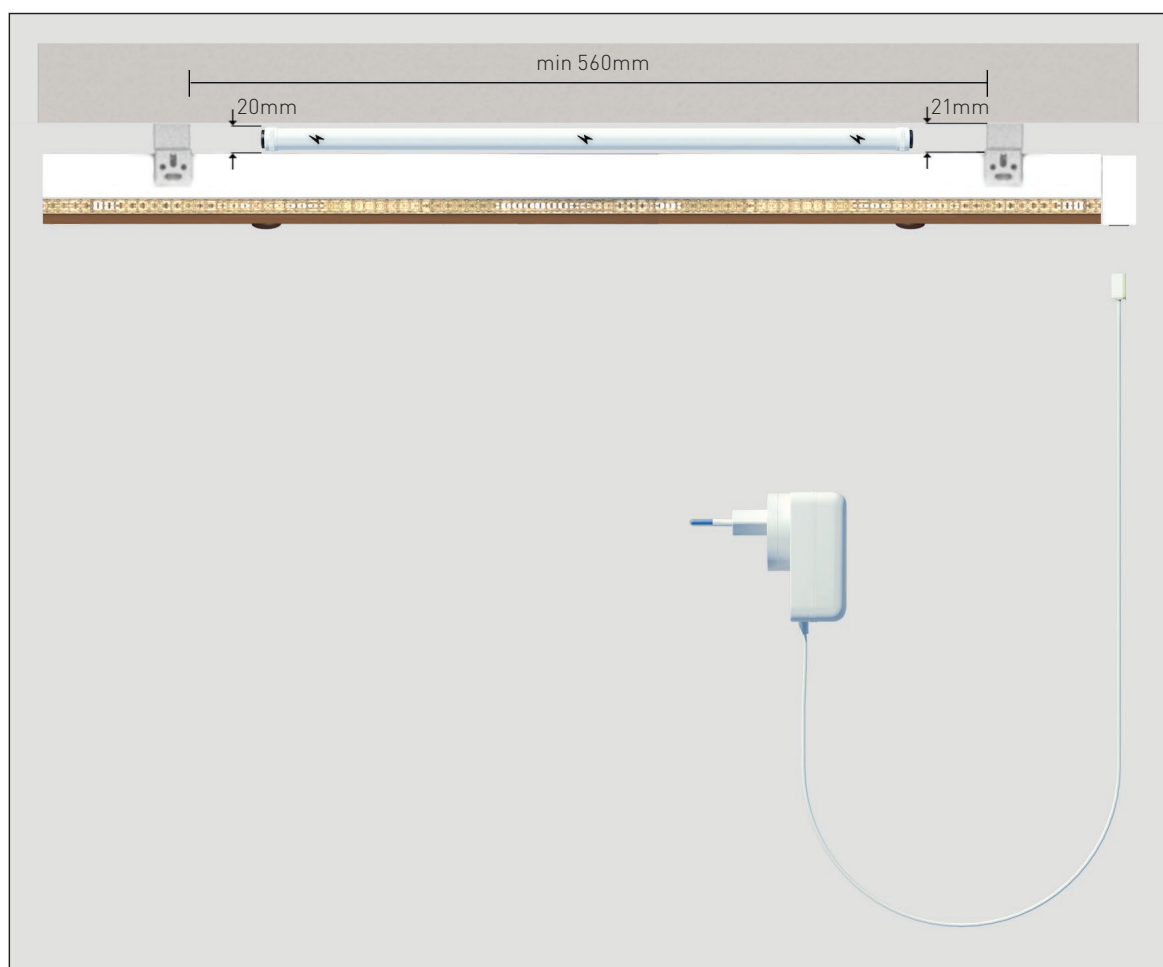

Option: Charger for rechargeable battery


JASNO Folds with solar-battery powered motor (Somfy Tilt & Lift 25 RTS)

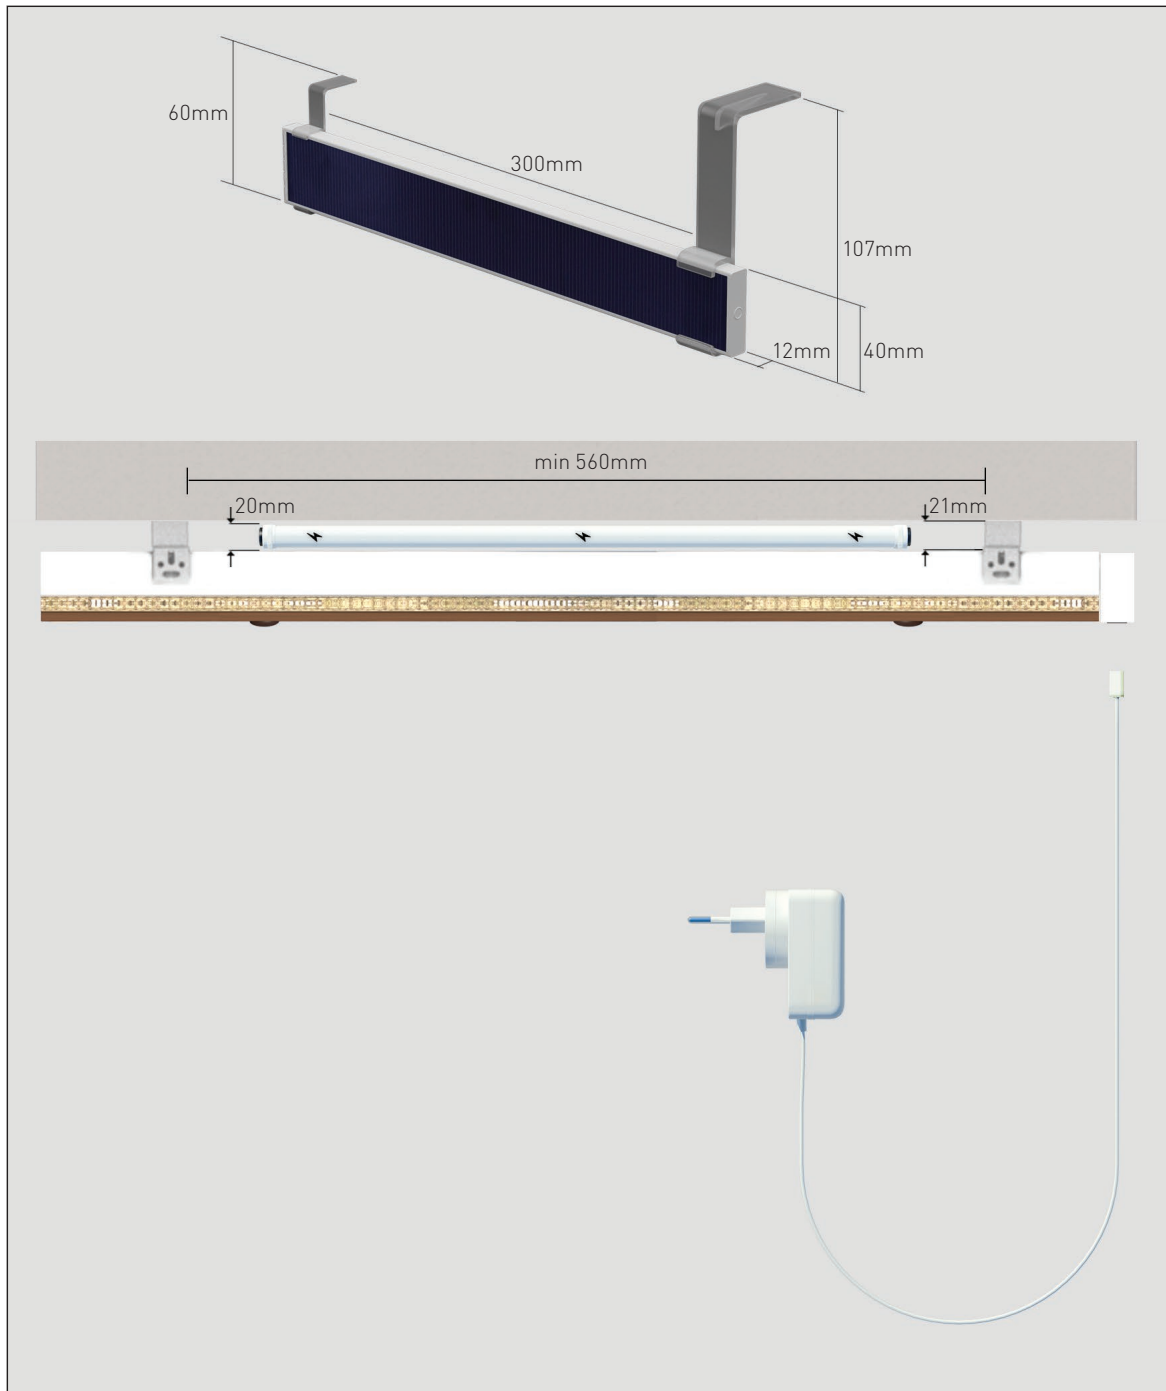

Option: Charger for rechargeable battery

The solar panel can be attached against the glass with double-sided tape, or fitted against the frame using transparent brackets.

JASNO Folds mains supply motor (Somfy Tilt & Lift 25 RTS)

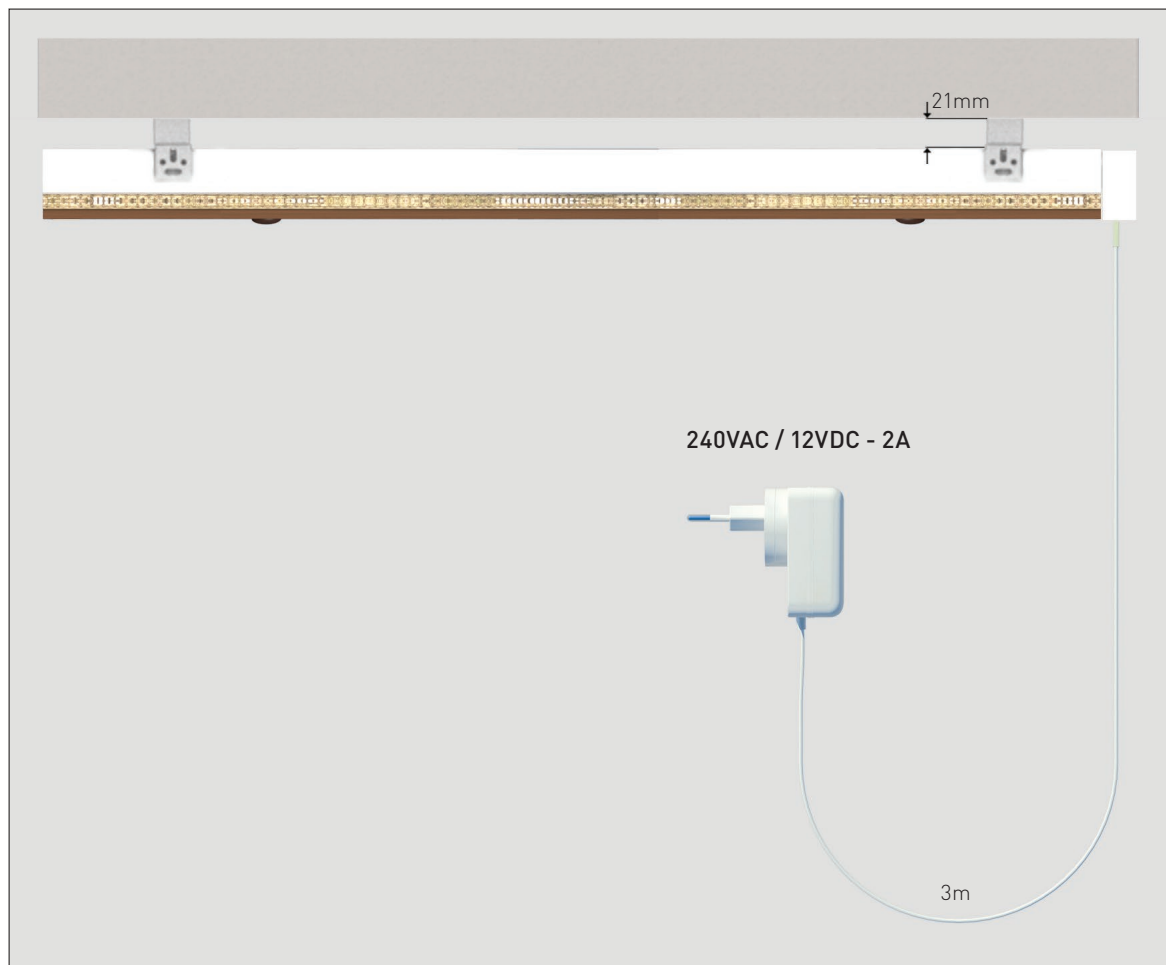

The JASNO Folds are then operated using a high-frequency remote control unit.
Both units offer a scroll function for fine-adjustment of the fold positions:



Telis 1 MOD/ VAR Pure
1 channel; several products
react simultaneously




Telis 4 MOD/ VAR Pure
4+1 channels; 5 groups of products can be
operated separately from one another

7. Installation instructions

Important note for fitting: the woven paper is an easily damaged material and folds and crinkles are difficult to remove. When fitting the folds, make sure the product is handled with care. Always work with clean, grease-free hands.

In the opening – on the frame

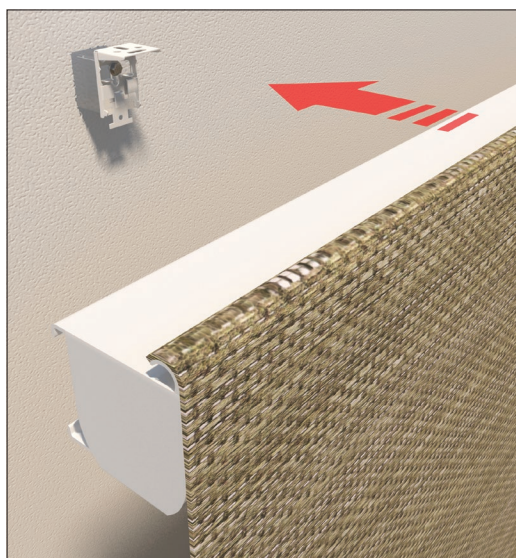

For these applications, the standard supplied 'click' mounting bracket can be used, with the 16mm transparent spacer, to ensure sufficient depth to raise the JASNO Folds.


Against the ceiling



If the folds are to be fitted against the ceiling, the transparent spacer cannot be used, and the 'click' mounting bracket has to be fitted against the ceiling at the required position. In that case, the mounting bracket must be fitted at least 16mm away from the wall, to prevent the strip rubbing against the wall or frame when the folds are raised.


In the opening or on the frame with extension bracket

SURCHARGE
SEE PRICELIST

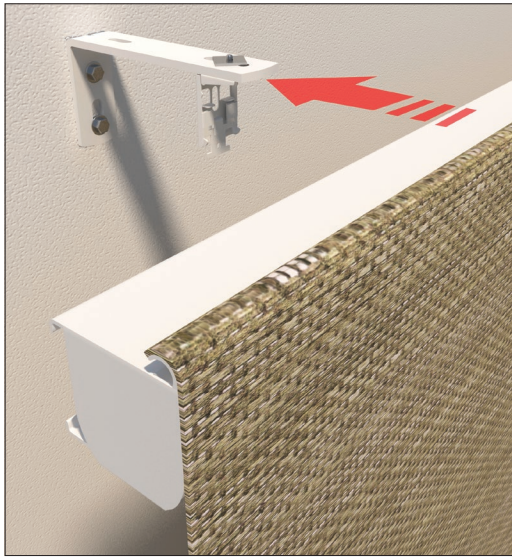


Fit the 'click' mounting bracket on the extension bracket and then fit the extension bracket to the frame or wall.

Position of mounting brackets

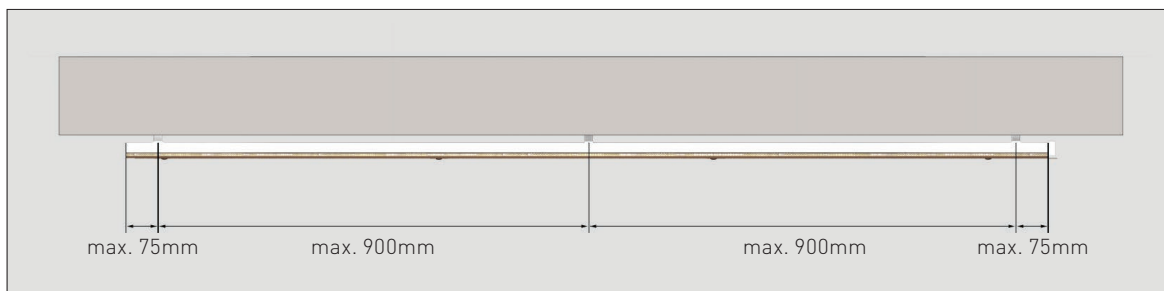


8. Use and operation

Despite the transparent PU edge finishing, it is always better to operate the JASNO Folds in this manner.

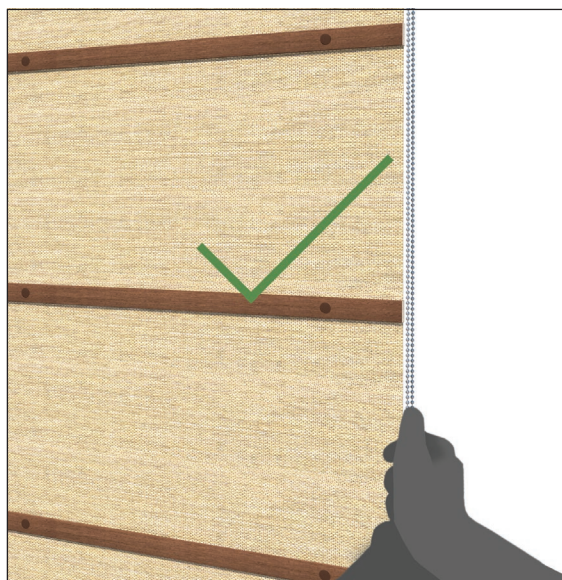

Chain operation correct

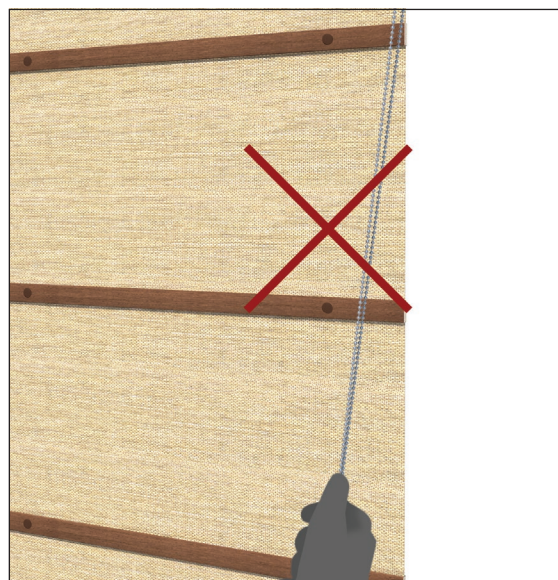

Chain operation incorrect

Do not allow the operating chain to rub against the textile during use, to avoid damaging the woven paper.

9. Warranty and maintenance

A 36-month warranty is provided on the system and the wooden strips. The woven paper for the semi-transparent, light filtering and blackout variants is subject to a 24-month warranty. All warranty rights are lost following incorrect use or failure to follow the instructions.

Semi-transparent and light filtering:

82% PAPER, 18% POLYESTER

Blackout: 100% POLYESTER



For cleaning, and to remove dust, use a vacuum cleaner with brush head on the fabric setting, or use a soft brush or Swiffer.



10. Delivery time

The delivery time for JASNO Folds is not more than 6 weeks following acceptance of the order by JASNO. During holiday periods, other delivery times may apply. You will be notified well in advance.

JASNO Folds are manufactured in the Netherlands.